

A 30 PLUS T-BF

CHARACTERISTICS

very high stock removal, very long service life, resin bonded, very productive


APPLICATION

cast steel, steel, structural steel, tool steel

COMPONENTS

aluminium oxide

SAFETY SIGNS

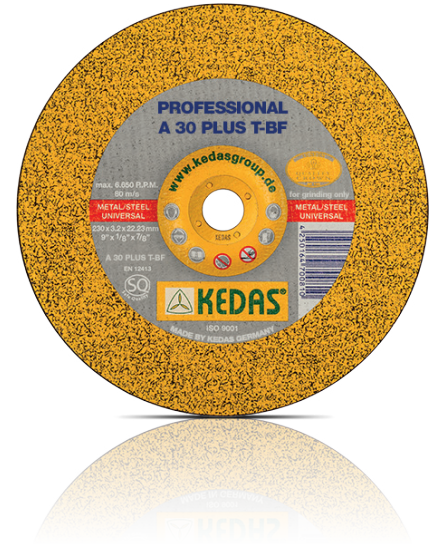

DIMENSIONS MM	DIMENSIONS INCH	SHAPE	MAX SPEED	MAX RPM
100x6.0x16.0	4 x 1/4 x 5/8		80 m/s	15,300
100x6.5x16.0	4 x 1/4 x 5/8		80 m/s	15,300
115x6.0x22.2	4 1/2 x 1/4 x 7/8		80 m/s	13,300
115x6.5x22.2	4 1/2 x 1/4 x 7/8		80 m/s	13,300
125x6.0x22.2	5 x 1/4 x 7/8		80 m/s	12,250
125x6.5x22.2	5 x 1/4 x 7/8		80 m/s	12,250
150x6.0x22.2	6 x 1/4 x 7/8		80 m/s	10,200
150x6.5x22.2	6 x 1/4 x 7/8		80 m/s	10,200
180x6.0x22.2	7 x 1/4 x 7/8		80 m/s	8,500
180x6.5x22.2	7 x 1/4 x 7/8		80 m/s	8,500
180x6.5x22.2	7 x 1/4 x 7/8		80 m/s	8,500
230x6.0x22.2	9 x 1/4 x 7/8		80 m/s	6,650
230x6.5x22.2	9 x 1/4 x 7/8		80 m/s	6,650
230x6.5x22.2	9 x 1/4 x 7/8		80 m/s	6,650

For more information please scan this code with your QR Code Reader.



KEDAS[®] Professional
Technology
Development

**THE EXPERTS
FOR HIGH QUALITY
CUTTING AND
GRINDING DISCS**

